


## PlugBox ESS<sub>Light</sub>

The PlugBox ESS<sub>Light</sub> is an auxiliary unit for the activation of power supplies that have 1-10V control inputs, in order to engage a late-night circuit (night dimming) by means of a second phase (230VAC). Additionally, a second phase (control phase), linked to the luminaire, is connected to the PlugBox ESS<sub>Light</sub>

To set the brightness of the luminaire, the 1-10V control input of the LED driver is steered by the PlugBox ESS<sub>Light</sub> such that the LED-current can be set in steps of 10%, from a low of 10% up to 100%.

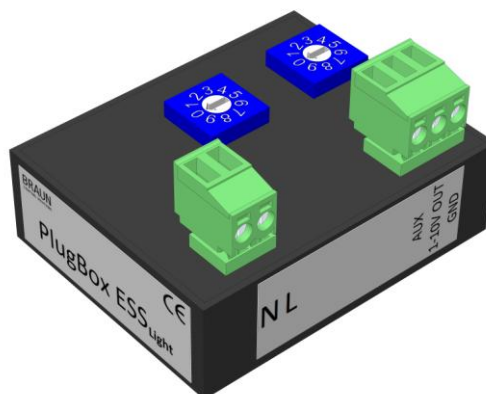

### 1 General Description

The PlugBox ESS<sub>Light</sub> is intended for the control of 1-10V interfaces. An auxiliary power source of about 10-12V is needed, which is already available on many commonly available power supplies that have a 1-10V control input. For this purpose, three terminals are available. Two additional terminals are intended for the 230VAC control voltage.

Two code switches are used for setting the brightness of the luminaire. Coding switch "B" controls the standard brightness and the "A" coding switch controls brightness during late-night-mode.

### 2 Adjustment using the code switches


The code switches have 10 positions for the brightness setting. Position „0“ is the lowest light intensity, while position „9“ is for maximum brightness. The adjustment is made in steps of 10%. It is noteworthy that the adjustment is on the basis of the LED current (brightness) and not on the power consumption of the luminaire. The following table maps the values to the settings:

Code switch position	LED-current
0	10%
1	20%
2	30%
3	40%
4	50%
5	60%
6	70%
7	80%
8	90%
9	100%

### 3 Terminals


The PlugBox ESS<sub>Light</sub> has 5 occupied terminals. The open terminals of the PlugBox ESS<sub>Light</sub>, are available for the connection of sensors (such as temperature). The following table shows the mapping of the terminals:

Terminal number	Function	Color
1	GND	Grey
2	1-10V OUTPUT	Purple
3	AUX (10-12VDC INPUT)	Yellow
4	not used	
5	not used	
6	not used	
7	not used	
8	230VAC Input	Brown
9		Blue

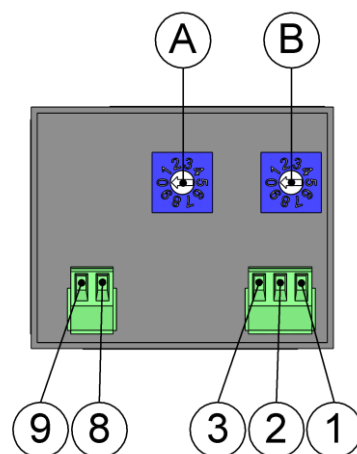

### 4 Technical Data

- Housing dimensions (height x width x depth): 15x50x40mm
- Overall dimensions (height x width x depth): 26x50x40mm

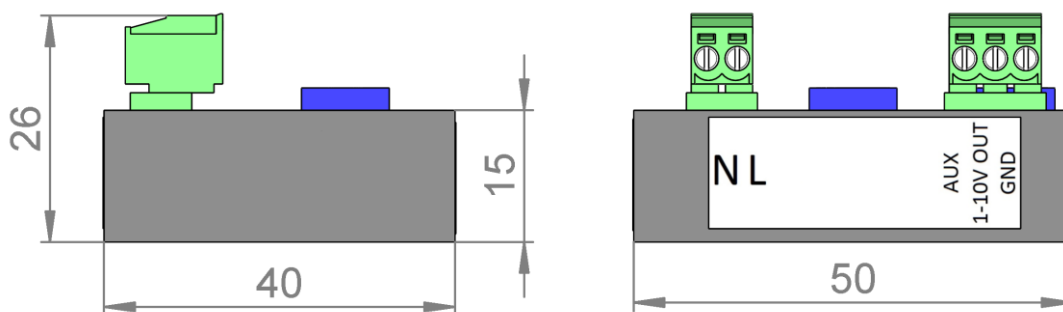

#### Notes:

The reproduction, modification and commercial use of this document or parts of this document without the written consent of BRAUN Lighting Solutions e.K. is prohibited. BRAUN Lighting Solutions e.K. excludes any liability for damage to the unit, as well as consequential damages applicable by unsuitability, improper construction or intervention in the system, incorrect operation and usage as well as non-compliance with safety regulations. All data are known in the art at the time of the draft of this document. Changes, thereby resulting deviations from this data sheet through innovations, technology improvement or modification are reserved. For mistakes and printing errors, we assume no responsibility.