

NewNight® LED Bollard

BLADE1000

This high-quality bollard from the NewNight® series BLADE is suitable as an orienting and conductive lighting in residential and administrative complexes, in parks and gardens, on paths, external staircases as well as access roads, and garage entrances.

Light control: BLADE-LENSING SYSTEM LED LIGHT 8in1

Light output: 360° rotationally symmetrical light distribution (alternatively 180° asymmetrical)

Supplied for the different dimensions of the installation locations and different heights above floor:
800mm | 1000mm

The bollard can be supplied with a ground anchor plate or with an integrated foundation pipe.

Housing: aluminum

Top: aluminum

Optical cover: impact-resistant, UV- and weather-resistant glass-clear plastic

Screw connections: stainless steel

Surface: anodized or painted

Colors: RAL or DB color or special colors of your choice

TECHNICAL DATA

System power 12 watts | 14 watts

LED lifetime > 60.000 Std.

LED color temperature 4100K*

Luminous flux 1040lm (12W) | 1488lm (14W)

Color rendering index CRI > 85

LED space IP 67

LED control gear IP 66

Operating voltage 90-260VAC, 50/60Hz


Protection class..... 1 (SKI)

Operating range..... – 40°C up to 55°C

Connection compartment with door lock: triangular

The bollard is wired ready for connection

* Color temperature freely selectable

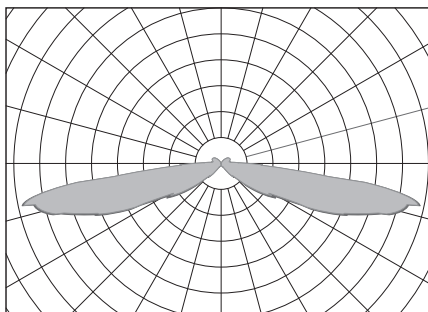

Braun Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.