

Rodan

Gas-Pole-top luminaire

The Rodan gas top light is a faithful reconstruction of the BAMAG U7. This gas lamp achieves an excellent illumination, with a highly brilliant and natural color rendering. This golden-yellow illumination makes the surroundings appear lively and natural. High quality materials guarantee its longevity. The luminaire is very easy to maintain due to a hinged roof and a fold-down glass dome. Due to its rotationally symmetrical light distribution, this luminaire is ideally suited for the illumination of squares, streets, residential areas, green spaces, and driveways.

Materials:

Lantern hood: Hinged arrangement made of uncoated, weatherproof aluminum

Hinges and fasteners: Stainless steel and galvanized sheet metal

Other components: Hot-galvanized steel

Reflector and dome ring: Powder-coated white (RAL 9016)

Glass dome: Borosilicate glass

Optionally lockable

Other color options available at additional charge
(RAL color table, special FerroGrip coating)



Main measurements:
Height ca. 830 mm
Width ca. 425 mm
Weight ca. 9 kg

Lamp pedestal options:

V1: Standard version with brass fixtures to mount the lantern to the masthead.

Lantern flange (150mm dia.) with 2 slots for masthead hole pattern of Ø79-105mm

V2: Version with bolted cover to secure the luminaire to masthead Lantern flange


(Ø150mm) with 2x slot (for M12) for capital hole pattern Ø79-105 mm

V3/V4: Version with bolted cover to secure the luminaire to the mast with spigot


V3: Ø60mm spigot

V4: Ø76mm spigot


(Other mounting types are available on request and at extra cost)



V1



V2



V3/V4

Technical description:

Distribution chamber | flames: 4 or 6


Prepared for mantel: Base 1562

Gas consumption natural gas H at constant temperature operating pressure 24 mbar: 0,1 m³/h (4 fl.)


The gas is ignited by electronic ignition.

An intelligent switching electronics controls a micro solenoid valve and guarantees functional safety. The BS-N 5.0 model is powered by a battery, the BS-GC Solar version is powered by solar technology.

BS-N 5.0

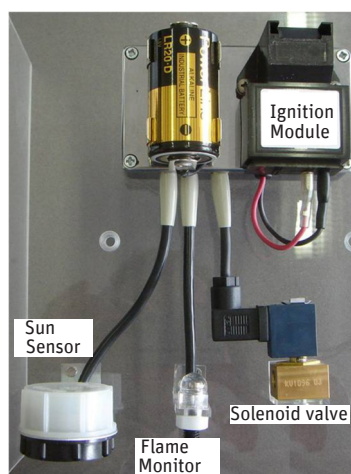

BS-GC Solar

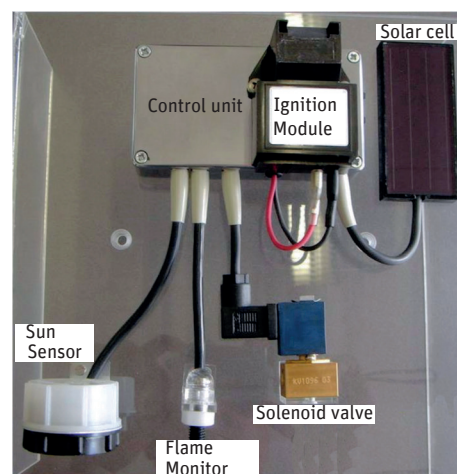

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.